


FEATURES

- Low Magnetic Noise
- High Efficiency
- Excellent Load Regulation
- Easy Assembly
- Very Low No-load Losses and Magnetizing Current
- Half Size and weight Comparing to EI Transformer
- Various Input Options
100v/110v/117v/120v/220v/230v/240v/. 50/60HZ
- Dielectric Strength 3KV/1min
- 100% Electric Parameters Test
- Power Range From 20VA to 3000VA Available According to Customer's Requirement
- Class B Insulation System
- Optional Single or Dual Primary

特性

- 无漏磁，低噪音
- 高效率
- 良好的负载调节性能
- 易于配装
- 低损耗第励磁电流
- 体积小重量轻
- 多种输入电压选择
100v/110v/117v/120v/220v/230v/240v/. 50/60HZ
- 初次与次级绝缘强度超过3KV/1分钟
- 产品电气性能100%全检
- 功率应用范围在20VA至3000VA间或根据客户要求订制
- B级绝缘系统
- 初级单输入与双输入可选择

CONSTRUCTION

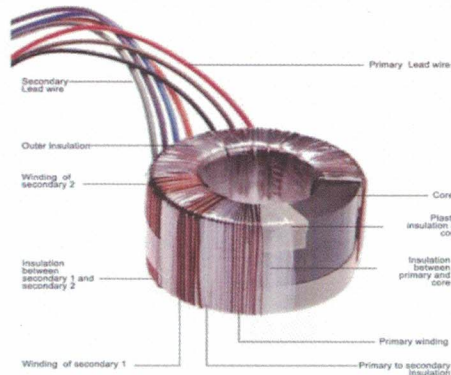

ELECTRICAL SPECIFICATIONS

Part No.	Power VA	AC Output		Dimension		Weight Kg
		Voltage range V	Current range A	OD mm	H mm	
		UC-TT0020	20	12-24	0.84-1.67	
UC-TT0025	25	12-24	1.04-2.08	65	35	0.38
UC-TT0030	30	12-24	1.25-2.50	70	40	0.45
UC-TT0035	35	12-24	1.46-2.92	72	40	0.49
UC-TT0040	40	12-24	1.67-3.34	75	40	0.53
UC-TT0045	45	12-24	1.67-3.75	75	40	0.57
UC-TT0050	50	12-36	1.67-3.75	80	40	0.68
UC-TT0060	60	12-36	1.67-5.00	83	43	0.73
UC-TT0070	70	12-36	1.95-5.84	85	43	0.83
UC-TT0080	80	12-36	2.22-6.67	90	43	0.98
UC-TT0090	90	12-36	2.50-7.50	95	43	1.05
UC-TT0100	100	12-36	2.78-8.34	100	43	1.20
UC-TT0150	150	12-24×2	3.13-6.25	105	48	1.50
UC-TT0200	200	12-24×2	4.17-8.33	110	50	1.80
UC-TT0250	250	12-24×2	5.21-10.42	120	53	2.20
UC-TT0300	300	12-24×2	6.25-12.50	120	55	2.40
UC-TT0350	350	12-24×2	7.29-14.58	123	58	2.65
UC-TT0400	400	12-24×2	8.33-16.67	125	60	2.90
UC-TT0450	450	24-48×2	4.69-9.38	128	63	3.00
UC-TT0500	500	24-48×2	5.21-10.42	130	65	3.20
UC-TT0600	600	24-48×2	6.25-12.50	132	65	3.82
UC-TT0700	700	24-48×2	7.29-14.58	145	65	4.30
UC-TT0800	800	24-48×2	8.33-16.67	145	70	4.56
UC-TT0900	900	24-48×2	9.38-18.75	150	73	4.93
UC-TT1000	1000	18-36×2	6.95-13.89	160	75	5.50
		30-60×2	4.17-8.33			
UC-TT1500	1500	18-36×2	10.42-20.83	170	80	7.05
		30-60×2	6.25-12.50			
UC-TT2000	2000	18-36×2	13.89-27.78	180	85	8.70
		30-60×2	8.33-16.67			
UC-TT3000	3000	12-24×2	10.42-20.83	195	90	11.60
		24-48×2	10.42-20.83			
		40-80×2	9.38-18.75			